





Grandlite® LED Dusk to Dawn

LED-762




APPLICATIONS

	Park
	Gas Station
	Parking
	Industrial Site

Meets DLC 5.1
Requirements



PRODUCT DESCRIPTION:

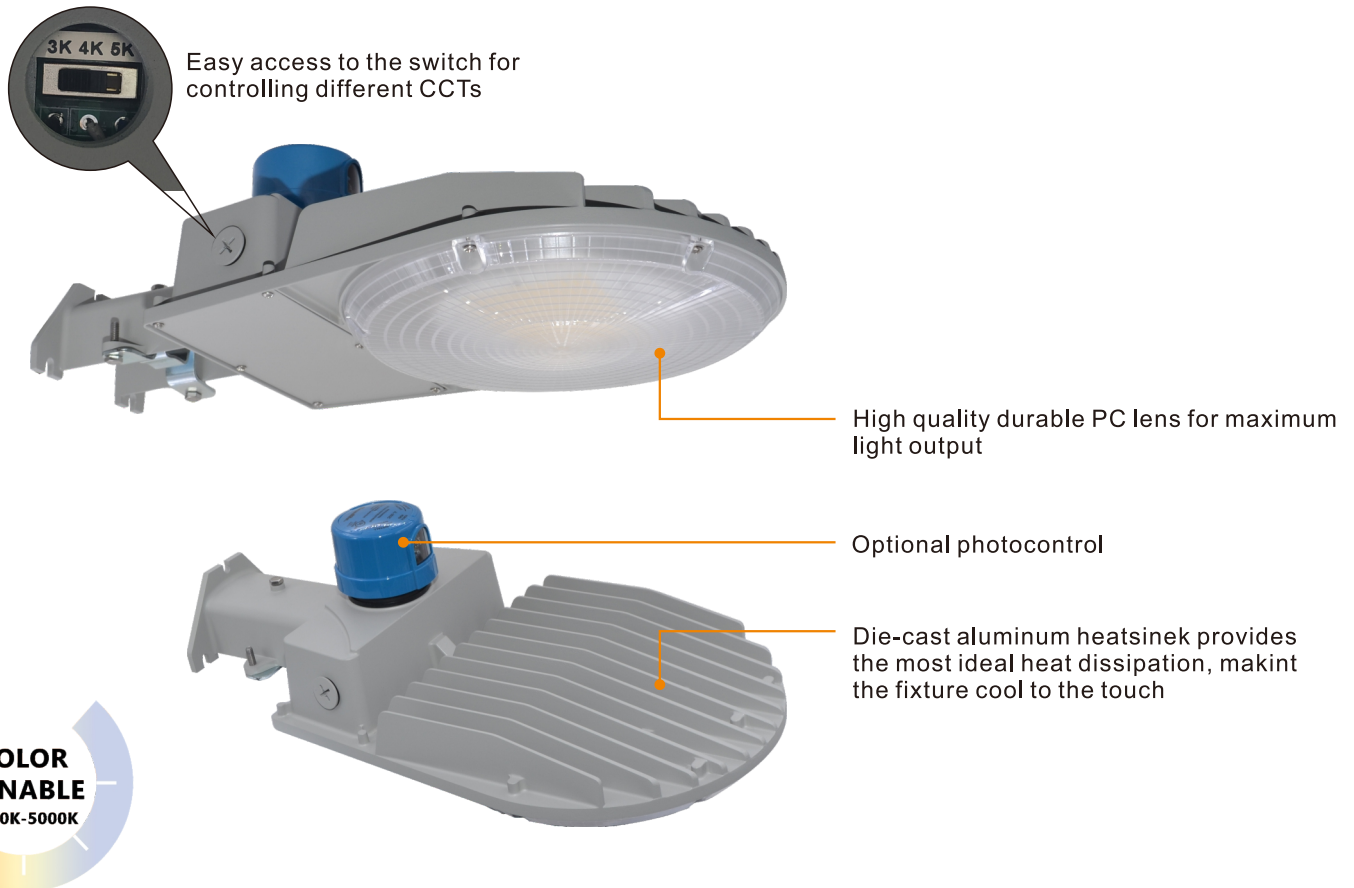

Product Description:

Dusk to dawn fixture of the future is here. Utilizing a single source LED, this dusk to dawn fixture provides prismatic-designed light output for any environment. It is optional to add a NEMA approved photocontrol which used LED that provides significant power savings. Maintaining all the strengths of the traditional dusk to dawn fixtures such as installation brackets and arms while utilizing the latest generation of LEDs, this LED dusk to dawn will last for years to come.

Optional mounting and Kelvin color* with adder.



Scan QR CODE
for more information

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

OPTIONS

Uniform light distribution

Finish - Gray. Color option with adder

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.



Performance Data


Model NO.	Color Temp		System Watts	Lumens*	Efficacy*
LED-762	Selectable CCT	3000K/4000K/5000K	80W	11137 lm**	139 lm/W*
	Single CCT	4000K/5000K	84W	10754 lm**	129 lm/W*
	Selectable CCT	3000K/4000K/5000K	117W	16103 lm**	137 lm/W*
	Single CCT	4000K/5000K	123W	15910 lm**	129 lm/W*
*Lumen and efficacy are based on 4000K for selectable CCT, and 5000K for non-selectable single CCT.					

Specification:

Example: LED-762

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Optional Accessories	Finish	Starting Temp
LED-762	84=84W 123=123W	UNV=120-277V	7=70+	30=3000 K 40=4000 K 50=5000 K	T5=Type V	PC=optional photocontrol	GR=Gray	-40°C

Dimension:

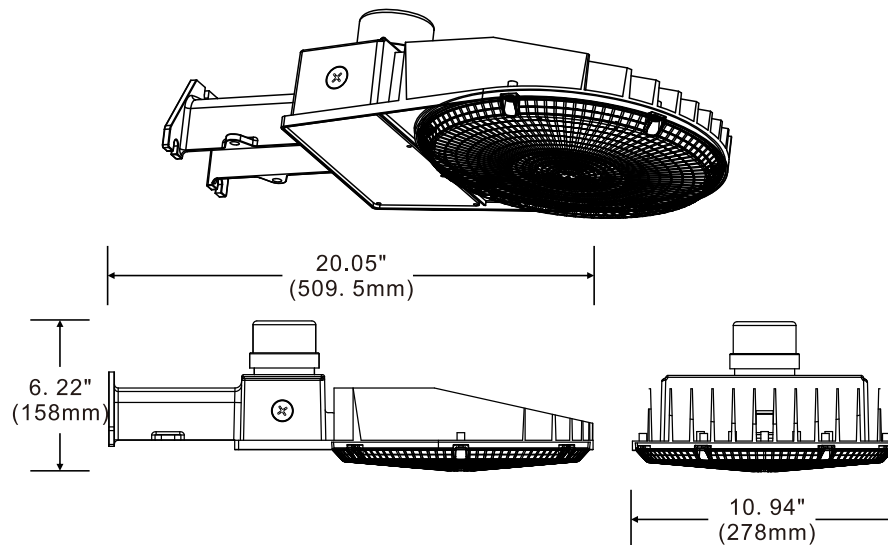

Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel: (626) 839-8868 Fax: (626) 581-8099

e-mail: sales@grandlite.com

 www.grandliteled.com

**Meets DLC 5.1
Requirements**

