



Grandlite®
HIGH POWER LIGHTING SYSTEM

LED Canopy Light

SML-009/012




Available Options




Optional photo control

Dimensions



SML-009

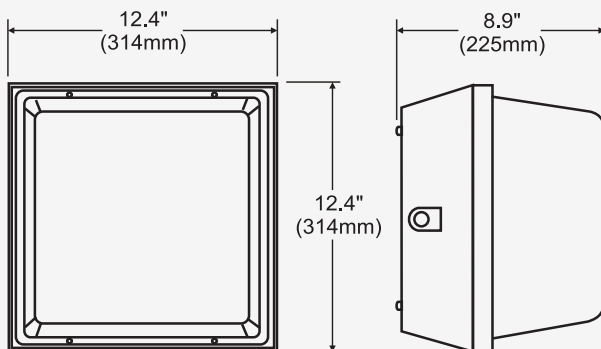

SML-012

Product Description:

The ruggedly designed LED canopy fixture will outlast the competition. With light output of a typical 70W-150W metal halide, it is an energy efficient replacement. Two sizes available allow these fixtures to be used in a wide variety of locations.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

High-impact acrylic diffuser

OPTIONS

Optional photo control

Optional 347V with adder

Finish - Bronze. Color option with adder

Specification

Model No. ▶	SML-009	SML-012	
System watts ▶	20	38	55
Lumen Output ▶	2014 lm**	3605 lm**	3906 lm**
Color ▶	5000K		
MA ▶	480 MA	950 MA	1400 MA
Input Voltage ▶	120~277V		
CRI ▶	70+		
Starting Temp ▶	-40°C		
Equivalent ▶	70-100W MH	100W MH	150W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



www.grandliteled.com