

Grandlite® LED Linear Pendant

LED-WL



LED-WL6

LED-WL4

APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges

**Meets DLC
5.1 Standards**



Product Description:

Keyholes slots for surface mounting

Diffuse lens for wide coverage

Available design option for subtle uplight.

Conduit knockouts for thru wiring

Optional 8W Emergency Driver

Dimmable LED driver with CCT tunable

Connectable Design Available



Step 1: Remove the end cap from each fixture



Step 2: Insert one of the fixture into the connecting adapter to secure it



Step 3: Following step 2, inserting the other fixture into the other side of the adapter



Step 4: Use 4 screws to secure the fixture onto the connecting plate



Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Product Description:


Pendant Mount



Surface Mount (Quick Mount Plate)



Included Quick Mount Plate for easy installation



Level Bubble



A
Uninstall the mounting bracket from fixture base plate by unscrewing the 2 hex socket studs.




B
Following the template, secure the base plate onto the fixture



C
Make sure two base plates are secured on each fixture



D
Lift the fixture up and tilt it slightly toward the quick mount plate as figure D shown, hook the fixture base plate with the mounting bracket.



E
Screw tight the bracket and fixture.



Scan QR CODE for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

LED Linear Pendant



Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

Features:

LISTING

- UL and CUL listed

HOUSING

- Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- Suitable for use in -40°C to +40°C

EFFICACY

- Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- 3000K, 4000K and 5000K CCT available, 80CRI

LENS

- Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- Voltage: 120-277V standard, Class 2 constant current

Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard); 50/60Hz;

- 2KV-4KV Surge.

- Dimming 0-10V driver Standard.

- Occupancy sensor (PIR) optional.



FINISHES

- Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



Performance Data

Model NO.	System Watts	Lumens*	Efficacy*
LED-WL4	37W	4312 lm*	117 lm/W*
LED-WL4-U/D	36W	4378 lm*	122 lm/W*
LED-WL6	56W	6577 lm*	117 lm/W*
LED-WL6-U/D	55W	6666 lm*	122 lm/W*
LED-WL8	73W	8624 lm*	118 lm/W*
LED-WL8-U/D	72W	8733 lm*	122 lm/W*

*Lumen and efficacy are based on 5000K

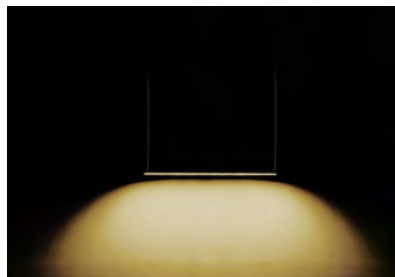

LED-WL4

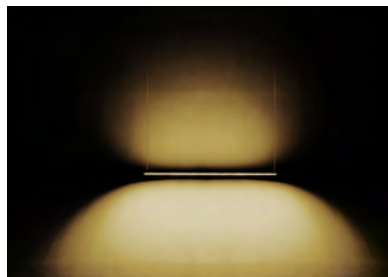

LED-WL4-U/D



Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Specification:


Example: LED-WL

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-WL4	37W	WL4/WL8 UNV= 120-277VAC	8=80+	30= 3000 K	WH=White	BLANK = No Sensor EM = Emergency Driver
LED-WL4-U/D	36W			40= 4000 K		
LED-WL6	56W	WL4/WL6 UNV= 120-347VAC		50= 5000 K		
LED-WL6-U/D	55W					
LED-WL8	73W					
LED-WL8-U/D	72W					

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Dimension:

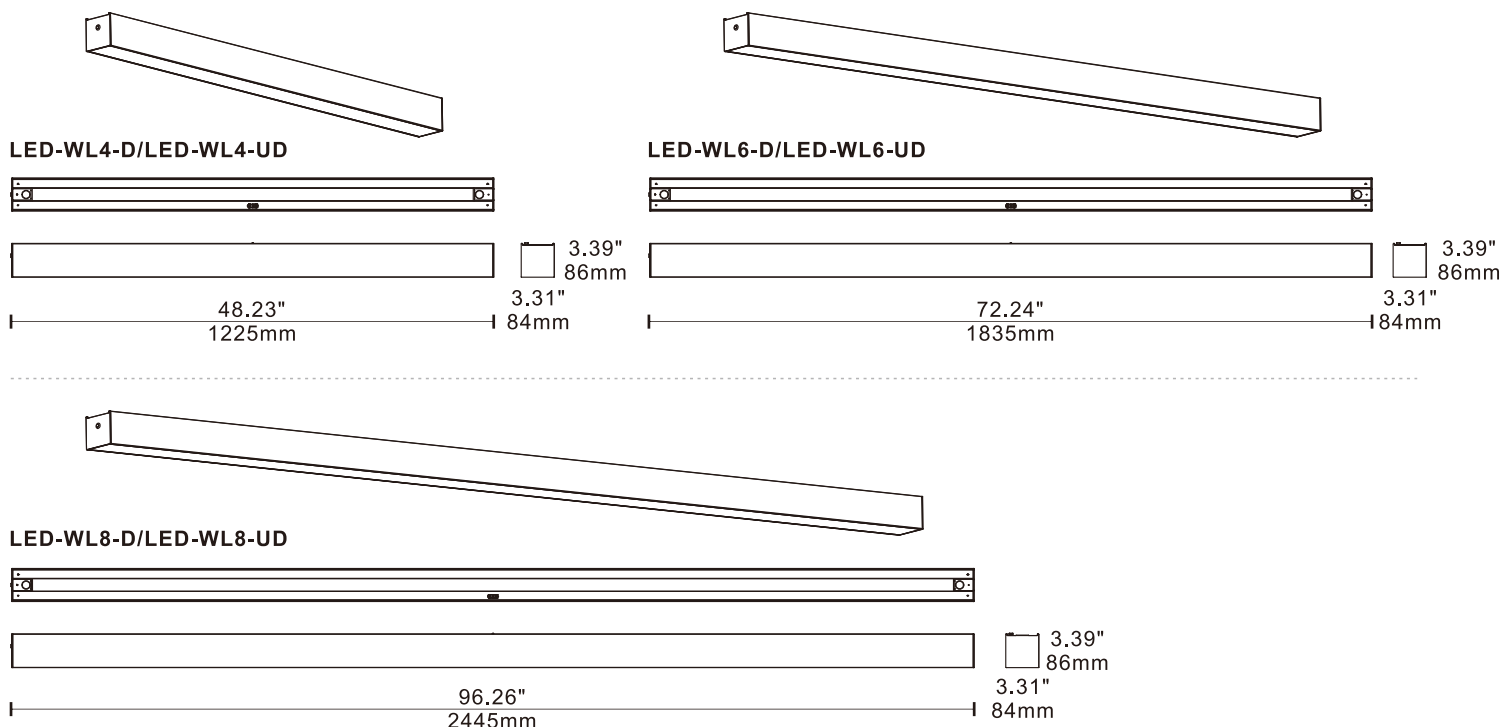

505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel: (626) 839-8868 Fax: (626) 581-8099

e-mail: sales@grandlite.com

www.grandliteled.com



Scan QR CODE
for more information