

**PRODUCT DESCRIPTION**

This compact but powerful flood light is a true innovation practically and aesthetically. The upgraded tuning switch allows for easy access to a range of CCTs, beam angles and wattages. Utilizing performance optics and a long-lasting driver, these landscape flood lights will last for years to come.



**LED FLOOD LIGHT**  
**LED-2170S**  
Meets DLC 5.1 Requirements



**FEATURES**

**LISTING**

UL and cUL listed for wet locations

**HOUSING**

Die-cast aluminum housing

**FINISH**

UV stabilized powder coated finish

**OPTIONS**

Optional photocell

Finish-Bronze. Color options with adder

Build in color adjustable control ranging from 3000K to 5000K



## OPERATING INSTRUCTIONS

### 3 CCT SELECTABLE

25° / 45° / 65°

### 3 WATTAGE SELECTABLE



9 / 16 / 24W

### 3 CCT SELECTABLE

3000K / 4000K / 5000K



## DIMENSION

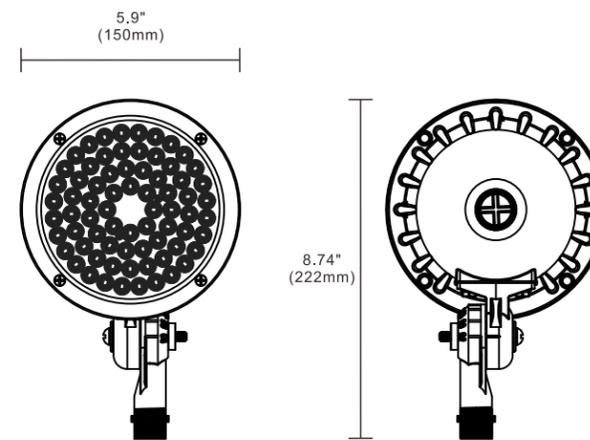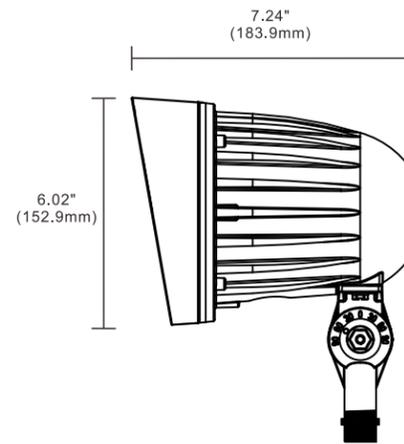

## PERFORMANCE DATA

Model No.	LED-2170S
Nominal Wattage	9/16/24W
Lumens*	3287 lm*
Efficacy*	144.17 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 4000K 45°	

## SPECIFICATION

Model No.	LED-2170S
Nominal Wattage	024=24W
Input Voltage	UNV=120-277VAC
CRI	8=80+
Color Temp	TX=3000K / 4000K / 5000K
Beam Angle	25° / 45° / 65°
Option	PC=Photocontrol S = Spike Mount
Finish	BN=Bronze
Operating Temp	-40°C - +40°C

## BEAM ANGLE

