

Grandlite® TUNABLE LED HIGH BAY

LED-4630V/4650V



APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges

Meets DLC 5.1 Requirements



Product Description:



Product Description:

A unique feature is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.

Features:

LISTING

- ▶ UL and CUL listed for damp locations

HOUSING

- ▶ Superior heavy duty die cast aluminum construction

OPTIONS

- ▶ Optional 347V with adder
- ▶ Acrylic reflector, AL reflector
- ▶ 16" Flat glass, Drop lens, Conical drop lens
- ▶ 6KV Surge
- ▶ 1-10V Dimming



Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Performance Data

Model NO.	Nominal Watts**	Lumen**	Efficacy**
LED-4630V	100/120/150W	18750 lm**	125 lm/W*
LED-4650V	135/180/240W	31535 lm**	125 lm/W*

** Lumen and Efficacy are based on highest wattage 5000K

Specification:

Example: LED-4650V

Model No.	Nominal Watts**	Input Voltage	CRI	Color Temp*	Distribution	Optional Accessories	Finish	Starting Temp
LED-4630V LED-4650V	150=150W 240=240W	UNV=120-277V	8=80+	40=4000 K 45=4500 K 50=5000 K	T5=Type V	FC = 16" Flat Glass and Clamp Band A = 16" Drop Lens with Clamp Band Y = 16" Conical Drop Lens with Clamp Band ALW = Aluminum Refractor White ALS = Aluminum Refractor Gloss AC = Acrylic Refractor Clear ACM = Acrylic Refractor Matte WG = 16" Wire Guard OCC = Microwave Occupancy Sensor EM = 30W Emergency Driver	WH=White BK=Black	-40°C

Accessories:



LED-46X0-FC

LED-46X0-ALW

LED-46X0-ALS

LED-46X0-AC

LED-46X0-ACM



16" Flat Glass And Clamp Band

16" Wire Guard

16" Conical Drop and Clamp Band

16" Drop Lens and Clamp Band





Scan QR CODE
for more information







* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

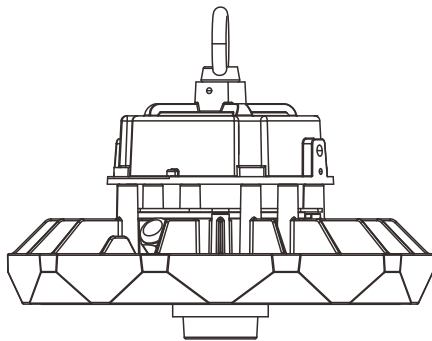

LED-4630V

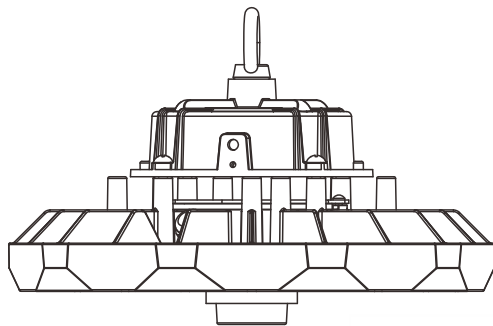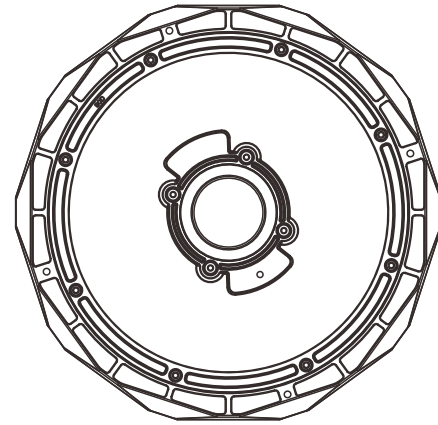

LED-4650V

