

Grandlite®

LED Flood Light

LED-26XX Series



LED-2615



LED-2675/26100



LED-2630/2650



LED-26150/26200

APPLICATIONS

	Street & Tunnel
	Park
	Gas Station
	Parking
	Industrial Site

Meets DLC
5.1 Premium



2020-07

Product Description:



SFS



SFS



SFS



SF



TR



TR



SF



TR



SF



TR

LED-2615

LED-2630/2650

LED-2675/26100

LED-26150/26200

Product Description:

This compact but powerful flood light is a true innovation practically and aesthetically. The upgraded color tuning switch allows easy access to a range of CCTs based on different environments. Utilizing performance optics and long lasting driver, these landscape flood lights will last for years to come.

Optional Kelvin color* with adder.

Features:

LISTING

► UL and CUL listed for wet locations

HOUSING

► Solid construction die-cast aluminum body

FINISH

► UV stabilized powder coated finish

OPTIONS

► Optional photocell

► Finish - Bronze. Color options with adder

Build in color adjustable control ranging from 3000K to 5000K

Performance Data

Model NO.	System Watts	Lumens	Efficacy
LED-2615	14W	1866 lm**	133 lm/W*
LED-2630	27W	3677 lm**	136 lm/W*
LED-2650	47W	6601 lm**	142 lm/W*
LED-2675	72W	9654 lm**	134 lm/W*
LED-26100	96W	13479 lm**	141 lm/W*
LED-26150	145W	20082 lm**	138 lm/W*
LED-26200	201W	27867 lm**	138 lm/W*

*Efficacy based on 4000K

Specification:


Example: LED-26XX Series

Model No.	System Watts	Input Voltage	CRI	Color Temp	Mounting Option	Option	Finish	Starting Temp
LED-2615	014=14W	UNV=120-277V	7=70+	TK=5000 K	SF=Slip Fitter	PC = Photocontrol*	BZ=Bronze	-40°C ~ +40°C
LED-2630	027=27W			TK=4000 K	TR=Trunnion	D = Dimmable		
LED-2650	047=47W			TK=3000 K	SFS=Knuckle	S = 4KV Internal Surge		
LED-2675	072=72W					*Not applicable to LED-2615		
LED-26100	096=96W							
LED-26150	145=145W							
LED-26200	201=201W							



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



Dimension:





LED-2615

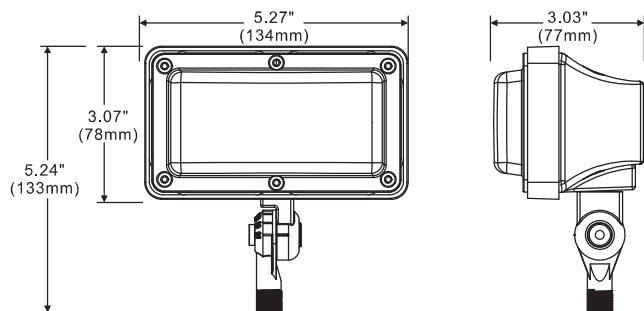


LED-2630/2650

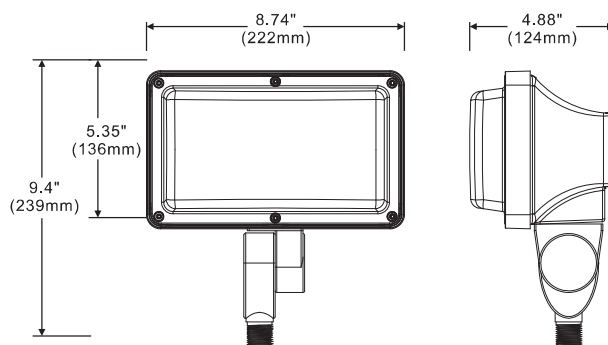

LED-2675/26100

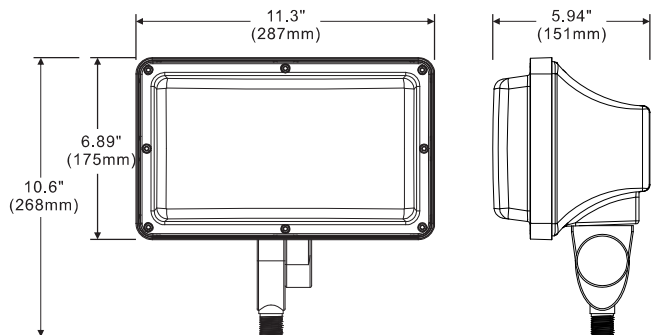

LED-26150/26200

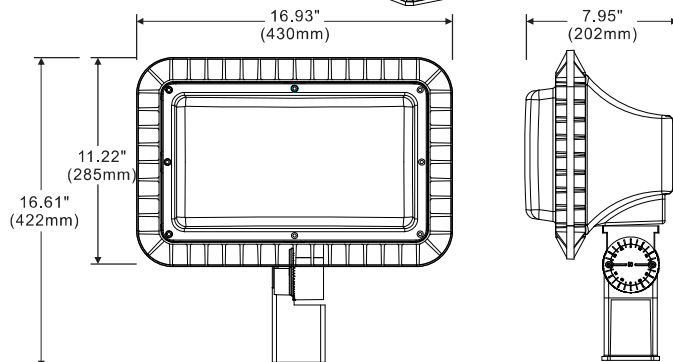

505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel: (626) 839-8868 Fax: (626) 581-8099

e-mail: sales@grandlite.com

www.grandliteled.com