



AVAILABLE OPTIONS



Optional photo control




Optional sensor




Quick mount

Line Drawing

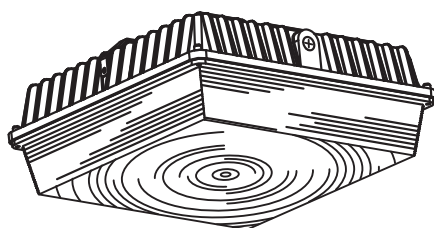

Dimensions

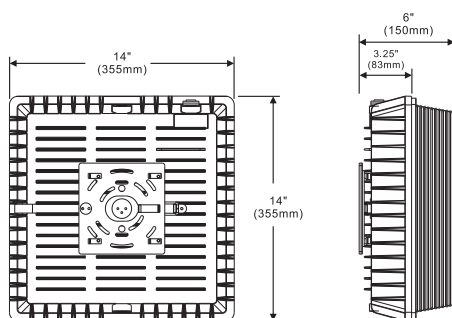

Product Description:

This canopy light has a slim and low profile design which provides safe and a visually appealing lighting experience. Luminaire can be mounted directly to the ceiling also 3/4" pendant mounting option is available. Quick mount structure for contractors to work safely and easily in the confined-space areas. It is a perfect solution to replace 100 metal halide lamp with a benefit of low maintenance cost.

Features:

LISTING

UL and CUL listed

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized power coated finish

LENS

Unique quick mount design

OPTIONS

Glare - free

Finish - Bronze. Color option with adder

SPECIFICATION

Model No.	LED-372	
System watts	88	118
Lumen Output	11176 lm**	13993 lm**
Color	5000K	
MA	1500 MA	2000 MA
Input Voltage	120~277V	
CRI	70+	
Starting Temp	-40°C	
Equivalent	150W MH	250W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.