



**PRODUCT DESCRIPTION**

This post top provides a subtle but stylish look for any job site. It is designed to save energy and reduce installation time. Optional photocontrol options allow for additional energy savings. This post top is perfect for your architectural street lighting needs.



**POST TOP LIGHT**  
**LED-9500N**  
Meets DLC 5.1 Requirements



**FEATURES**

**LISTING**

UL and cUL listed for WET LOCATIONS

**HOUSING**

Corrosion resistant heavy duty-cast aluminum construction. Standard 3" open on the bottom  
Wiring Compartment on the Top for easy access and ease of installation

**FINISH**

Superior powder coat finish to withstand the toughest weather

Standard bronze with color options

**OPTIONS**

Optional photocontrol  
Optional Microwave Sensor

## OPERATING INSTRUCTIONS

### 3 WATTAGE SELECTABLE


60 / 40 / 20W

### 3 CCT SELECTABLE


5000K / 4000K / 3000K



## TYPE V OPTICAL DISTRIBUTION

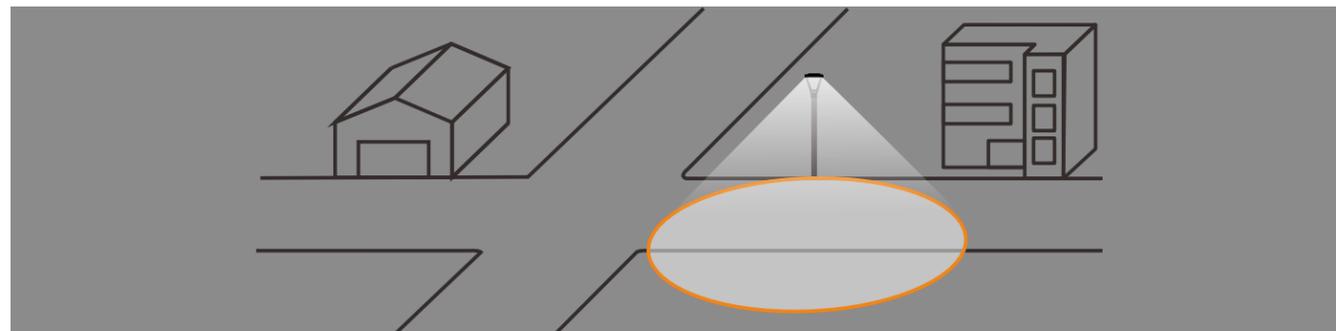

## DIMENSION

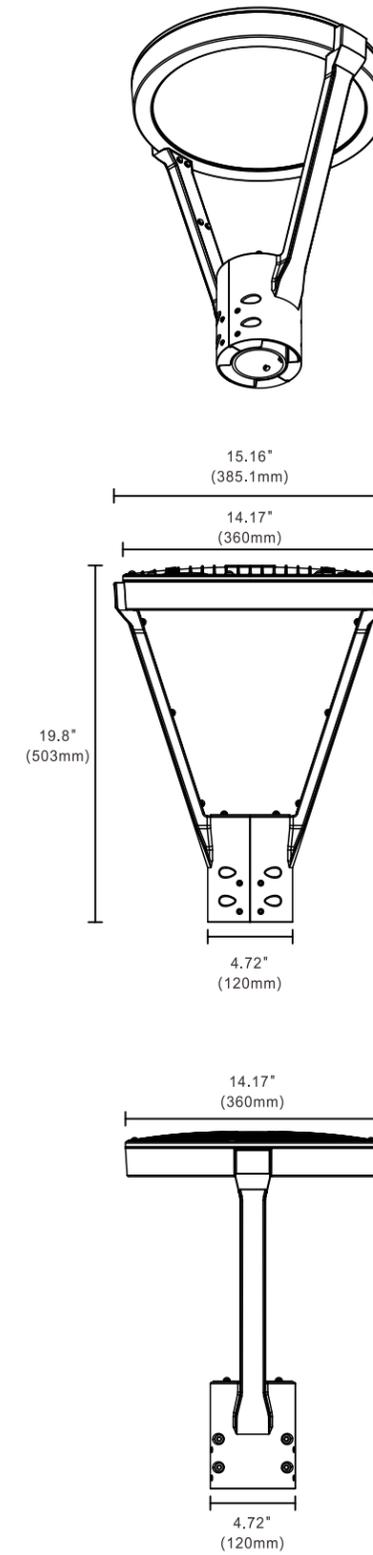

## PERFORMANCE DATA

Model No.	LED-9500N
Nominal Wattage	20/40/60W
Lumens*	8243 lm*
Efficacy*	135.6 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 5000K	

## SPECIFICATION

Model No.	LED-9500N
Nominal Wattage	060=60W
Input Voltage	UNV=120-277VAC
CRI	8=80+
Color Temp	TX=3000K / 4000K / 5000K
Distribution	TYPE V
Option	MS=Microwave Sensor PC=Photocontrol
Finish	BN=Bronze
Operating Temp	-40°C - +40°C